

Model 2CDXU/2CDU

2-stage centrifugal



EBARA

Model 2CDXU / 2CDU

Features

- **Close coupled design**
 - saves space; simplifies maintenance and installation
- **Stainless steel liquid end components**
 - high quality; corrosion resistance
- **Versatile mounting**
 - can be installed horizontally or vertically
- **Back pullout construction**
 - assembly and overhaul of the impeller and seal without disturbing suction and discharge connections
- **Top centerline discharge and foot support under casing**
 - ensures self-venting and reduces misalignment from pipe loads
- **High operating efficiency**
 - lowers operating costs
- **High quality mechanical shaft seals and o-rings**
 - available for standard pumping requirements or optional high temperature and chemical duty operation
- Available with **IP55 TEFC motor (2CDXU)** or **Standard NEMA motor (2CDU)**

Applications


- Plant services
- Water supply systems
- Reverse osmosis
- Aqueous cleaning
- Bottle Washing
- Cooling systems
- Car wash
- Scrubbers
- Ultrapure water systems
- Jockey pump services
- Air conditioning
- Sprinkler/flow irrigation
- OEM equipment application
- Pressure boosting
- Liquid transfer
- Heat exchanger
- Spray systems
- Beverage processing
- Pharmaceutical services
- Water reclamation and treatment
- Heating systems
- Parts washers
- Poultry misting systems



*Note: Model 2CDU is NSF/ANSI 61 Annex G listed

Certified to NSF/ANSI 61, ANNEX G

2CDXU / 2CDU selection chart

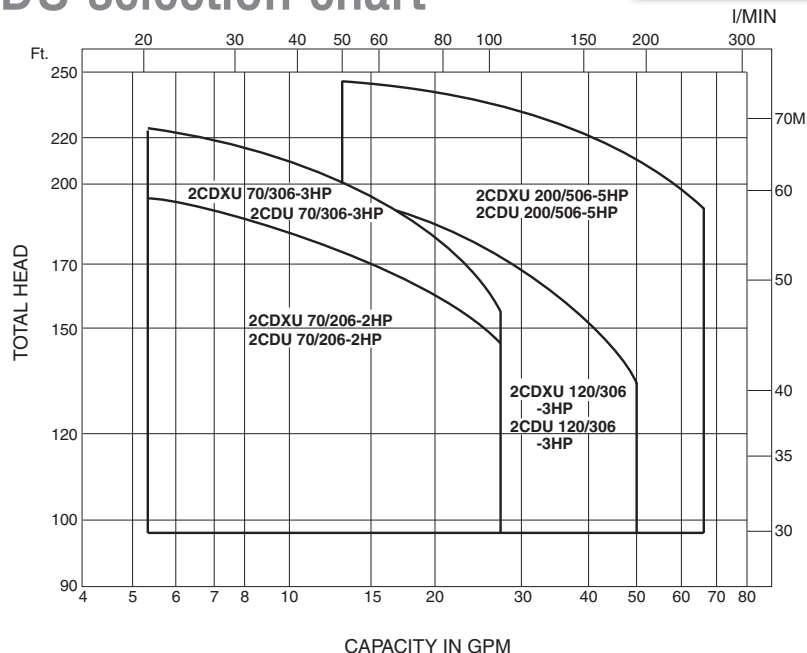

EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • (t) 803 327-5005 • (f) 803 327-5097

www.pumpsebara.com

© 2005 EBARA International Corporation

EIC2CD(X)U 0312