


Model 3U/CDU

end suction centrifugal

EBARA

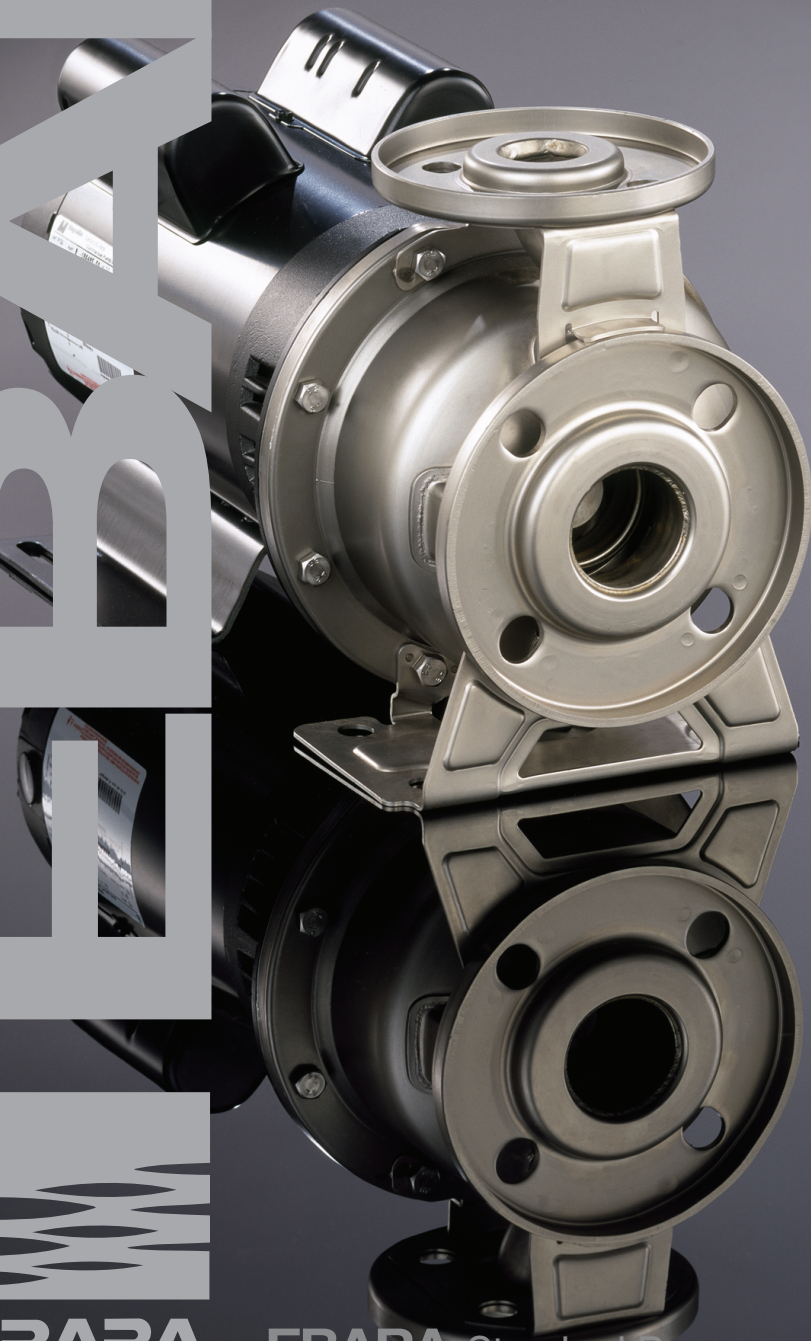

Model 3U/CDU

Features

- **Close coupled design**
 - saves space; simplifies maintenance and installation
- **Stainless steel liquid end components**
 - high quality; corrosion resistance
- **Versatile mounting**
 - can be installed horizontally or vertically
- **Back pullout construction**
 - assembly and overhaul of the impeller and seal without disturbing suction and discharge connections
- **Top centerline discharge and foot support under casing**
 - ensures self-venting and reduces misalignment from pipe loads
- **High operating efficiency**
 - lowers operating costs
- **High quality mechanical shaft seals and o-rings**
 - available for standard pumping requirements or optional high temperature and chemical duty operation




*Note: NSF/ANSI 61 Annex G listed

Certified to NSF/ANSI 61, ANNEX G

Applications

- Plant services
- Water supply systems
- Washing plants
- Cooling water
- Car wash
- Scrubbers
- Ultrapure water systems
- Jockey pump services
- Air conditioning
- Sprinkler/flow irrigation
- OEM equipment application
- Pressure boosting
- Liquid transfer
- Heat exchanger
- Spray systems
- Heating
- Beverage processing
- Pharmaceutical services
- Water reclamation and treatment
- General pump applications

3U selection chart

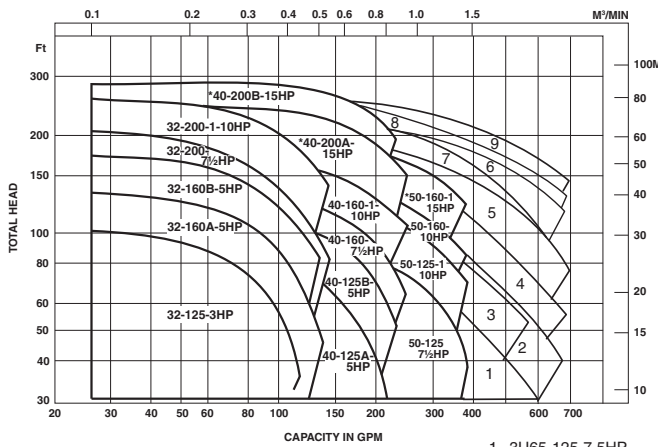


*Three phase motor only

1. 3U65-125-7.5HP
2. 3U65-125-10HP
3. 3U65-160-10HP
4. 3U65-160-15HP*
5. 3U65-160-20HP*
6. 3U65-160-25HP*
7. 3U65-200-20HP*
8. 3U65-200-25HP*
9. 3U65-200-30HP*

*Note: Model 3U-65 – standard bronze impeller; optional SS impellers available

CDU selection chart

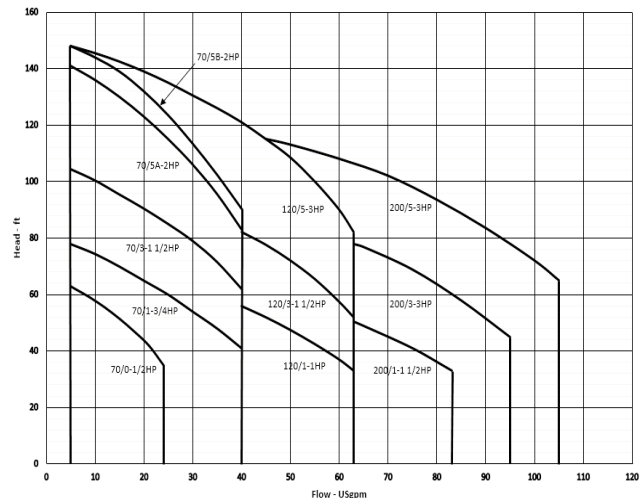

EBARA Standard Pumps

1651 Cedar Line Drive • Rock Hill, SC 29730 • (t) 803 327 5005 • (f) 803 327 5097

www.pumpsebara.com

© 2018 EBARA Pumps Americas Corporation

EPACCDU3U0918