





Model CMLEU

Features

S DUM

- Economical alternative, commercial/industrial use
- Non-clog, single channel impeller has 3" spherical passage;
 prevents clogging; high efficiency and saves energy
- Robust construction large diameter, short overhang shaft with stainless steel fasteners
- Double mechanical seals silicon carbide lower seals, carbon/ceramic upper – hard faced upper and lower seals operate in an oil bath; providing longer service life and lower maintenance costs
- Air-filled, Class F insulated, heavy duty motor, rated for 20 starts/hour, dissipates heat easily, operates cooler with higher efficiencies; longer service life with lower operating costs
- Built-in motor protection with autocut, (3HP) protects motor against overheating, out-of-phase, single phasing, and no load; (5 to 30HP) provides overtemp protection; saves money on costly motor replacement
- High quality stainless steel shaft; provides high tensile strength, corrosion resistance, longer life, and lower maintenance costs

Standard Specifications

	Horsepower	3 to 30HP
	Capacity	55 to 1345 GPM
	Total head	12 to 136 feet
	Max.Liquid temp.	104°F/40°C
Speed		1800 RPM
Materials	Casing	Cast Iron
	Impeller	Cast Iron
	Shaft	403 Stainless Steel

Cast Iron

304 Stainless Steel

3, 4, 6 inch

Fastener Construction Mechanical Seal

Motor Frame

Discharge

Design

Double Mechanical Seal

Material – Upper Carbon/Ceramic

Material – Lower Silicon Carbide/Silicon Carbide
Impeller Type Non-clog single channel enclosed
Bearing Prelubricated Ball Bearing

Motor Air-filled, Insulation
Insulation Class F

Three Phase 208/230V, 460V

Service Factor 1.15


Motor Protection Built-in Auto cut (3HP model)

Thermal Detector – Klixons Mechanical seal leak detector – internal oil probe

Submersible Cable 33 ft. standard cable length, Optional 66 ft.

Accessories Optional QDC System

CMLEU selection chart

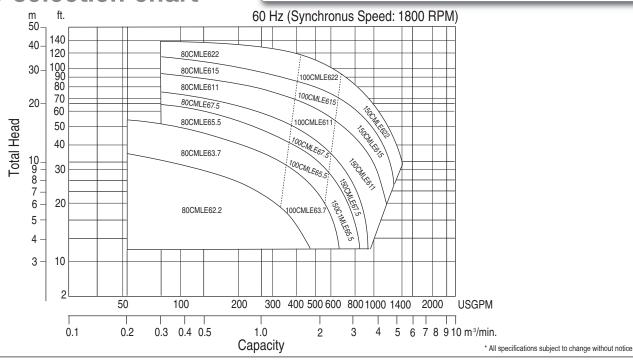



EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • t (803) 327 - 5005 • f (803) 327 - 5097 www.pumpsebara.com

© 2011 EBARA International Corporation, All rights reserved.

EFHCMLEU1011