


STAINLESS STEEL CASE – Stands up to the elements.

CHROME STEEL IMPELLER – Provides increased efficiency and performance in 2-5 HP models.

OPEN VEIN IMPELLER – Offers wide open performance for high volume in 1/2 and 1 HP models.

SACRIFICIAL ANODE PROTECTION – Slows damaging oxidation of the pump. RP35 and RP41 only.

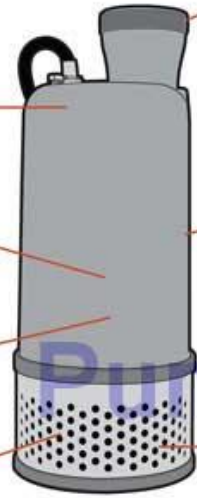

THREADED NPT DISCHARGE – Easy transition to a hose or pipe.

DOUBLE MECHANICAL SHAFT SEAL – Abrasion-resistant, providing maximum motor protection with added oil reserve. The upper seal is carbon/ceramic and the lower seal is silicon/silicon.

STRAINER INLET – For added flexibility and durability, passes between .31" to .43" solids.