

TE-7-MD-CK



Features

- Thermally Protected, Totally Enclosed, Fan Cooled, Capacitor Start Motor
- Ball Bearings
- Conduit Box (Must be field wired)
- Specific Gravity to 1.1
- Fluid Temperature to 200 Degrees F.
- Ambient Air Temperature to 77 Degrees F.
- NOTE: Consult your local distributor or the factory for applications with higher ambient temperatures, specific gravities and viscosities.


Construction

- Volute Carbon-filled Kynar®
- Backplate Carbon-filled Kynar®
- Impeller Carbon-filled Kynar® w/Carbon-filled Teflon (Chemloy) Bushing
- Shaft Ceramic (Silicon Carbide on 587639)
- Thrust Washers Ceramic (Silicon Carbide on 587639)
- O-Ring Viton® (Teflon on 587639)

The Little Giant MD-CK series features leakproof, seal-less magnetic drives and are designed for in-line, non submersible use. Volute, magnet housing and impeller are carbon-filled Kynar[®] for excellent chemical resistance. Ceramic shaft and thrust washers are 99.5% pure alumina (except 587639 which are Silicon Carbide). Pumping heads are easily rotated, cleaned or serviced with no special tools required. Spindle shaft is supported at both ends to prevent impeller damage during start-up and stop of pump.

Little Clant Rump Co.


TE-7-MD-CK

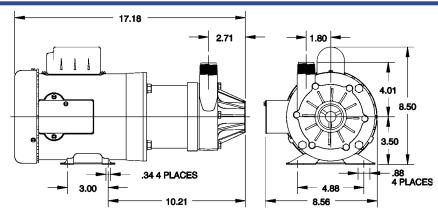

NOTE: Designs and dimensions may vary for various reasons (i.e. type of motor). This information should be used as general guide rather than an unqualified guarantee. Specifications are subject to change without prior notice.

Specifications

Model	Item									Performance (GPH @ Head)			ead)	Shut Off		Pwr. Cord	Weight	
No.	No.	Intake	Discharge	Listing(s)	HP	Volts	Hertz	Amps	Watts	1'	10'	25'	40'	50'	Feet	PSI	(ft)	(Lbs.)
TE-7-MD-CK	587600	1-1/2" FNPT	1" MNPT	UR/C-CSA	3/4	115	50/60	10.4/11.8	1080/1230	3150	2800	2400	1850	1300	58.5	25.3	N/A	40.00
						230	50/60	5.2/5.9	1080/1230									
TE-7-MD-CK	587639	1-1/2" FNPT	1" MNPT	UR/C-CSA	3/4	115	50/60	10.4/11.8	1080/1230	3150	2800	2400	1850	1300	58.5	25.3	N/A	40.00
						230	50/60	5.2/5.9	1080/1230									
TE-7-MD-CK	587603	1-1/2" FNPT	1" MNPT	UR	3/4	230	50/60	2.4/2.9	1080/1230	3150	2800	2400	1850	1300	58.5	25.3	N/A	40.00
3 PHASE						460	50/60	1.2/1.45	1080/1230									
7-MD-CK	587103	1-1/2" FNPT	1" MNPT		Р	ump He	ad Less	Motor										8.00

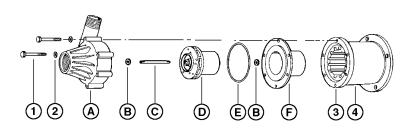

FLOW - LITERS/HOUR 0 2000 4000 6000 8000 10000 12000 70 20.0 60 50 15.0 HEAD - FEET 40 10.0 30 20 5.0 10 0 0 500 1000 1500 2000 2500 3000 3500 FLOW - GALLONS/HOUR 60 Hz

50 Hz

Replacement Parts

ITEM	PART NO.	DESCRIPTION					
A	187015	Volute					
В	187085	Thrust Washer, Ceramic					
В	187058	Thrust Washer, Silicon Carbide for 587639					
С	187056	Shaft, Ceramic					
С	187057	Shaft, Silicon Carbide for 587639					
D	187174	Impeller					
Е	924016	O-Ring, Viton					
Е	924019	O-Ring, Teflon, for 587639					
F	187024	Backplate					
1	903712	Bolt					
2	921050	Washer					
3	187121	Drive Magnet					
4	187073	Mgt. Bracket					

Little Giant Pump Co.

PO Box 12010 Phone: 405.947.2511 Okla. City, OK 73157 Fax: 405.228.1550 **www.LittleGiantPump.com**